

CONOFLOW PNEUMATIC PISTON ACTUATORS GB50 - GB55 Series



Conoflow's Pneumatic Piston Actuators are compact units designed to function in today's high performance instrument systems.

Piston diameters of 3" to 12.5" are available with standard strokes up to 10" (for stroke lengths greater than 10", consult the factory). Integral positioners are standard for modulating service.

Force produced is a function of the supply pressure which can be varied from 20 to 100 PSI (138 to 690 kPa). Fast stroking speeds are made possible through the use of a high capacity positioner coupled with a unique cushion-loading regulator. The GB50 Series Piston Actuators are designed for use in corrosive atmospheres or adverse weather conditions.

OPTIONAL ACCESSORIES:

- 1) Model GFH60XTKEGI Airpak® (Filter-Regulator) with gauge. Specify 0-60 or 0-125 PSI (0-414 or 0-861 kPa) range. (Bracket mounting is standard.)
- 2) I/P or E/P Transducer. Specify range. (See Transducer Data Sheets).
- 3) Airlock Feature, Solenoid Valve, Limit Switch and other accessories are available, consult the factory.


GB50: A7-107, 108, 109 AND 110
GB51: A7-114, 115, 116 AND 117
GB50 SERIES (Yoke Type): A7-100, 101, 102 and 103
GB50 Series (On/Off): A6-41 and 113
Piping: A50-48

PRINCIPLE OF OPERATION

These units are actuated by a differential pressure across the moving piston. The piston is forced upward by a pressure from a cushion-loading regulator. This pressure can be adjusted to accommodate force requirements of the stem. The chamber above the piston is dynamically loaded through the positioner which operates on the force-balance principle. In the most conventional positioner form, an increase in instrument signal permits air flow into the chamber above the piston, increasing the pressure and moving the piston downward. This extends the range spring until the positioner is brought back into balance, at which point it is in a position corresponding to the instrument signal. A decrease in instrument signal reverses the procedure.

Actuators may also be supplied with a reverse acting positioner allowing the piston to retract with an increase or decrease in instrument signal.

When stem strokes are greater than 10", or when characterization is required, consult the factory for catalog number and pricing.

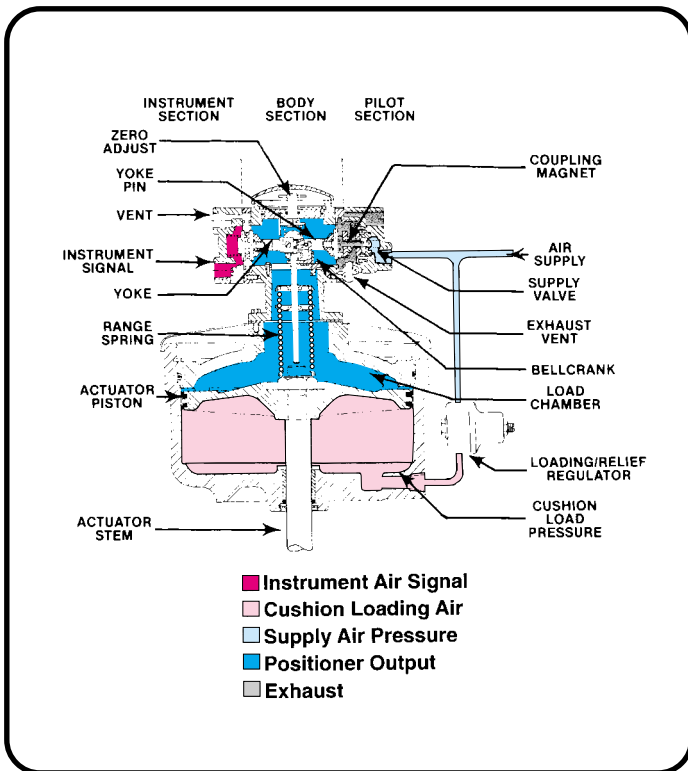

SPECIFICATIONS

OPERATING CHARACTERISTICS	GB50 (1)	GB51 (1)	GB52 (1)	GB53 (1)	GB54 (1)	GB55 (1)
Piston Diameter	3"	4"	6"	8"	10"	12.5"
Effective Area	7 in ² (6.45 cm ²)	12 in ² (77.42 cm ²)	28.5 in ² (183.87 cm ²)	50 in ² (322.58 cm ²)	78 in ² (503.23 cm ²)	123 in ² (793.55 cm ²)
Stroke Length	1/4" to 10". Longer strokes are available, consult the factory.					
Supply Pressure	20 to 100 PSI (138 to 690 kPa)					
Air Consumption w/Positioner	Static: 0.30 SCFM (0.008 m ³ /min) at 40 PSI (275 kPa) supply Dynamic: 5 SCFM (0.142 m ³ /min) (max) at 100 PSI (690 kPa) supply					
Thrust	Thrust, T, equals the product of piston effective area, A, multiplied by supply pressure differential, ΔP, [up to 100 PSI (690 kPa)]. $T = (A)\Delta P$. Example: Develop the thrust of a GB51 actuator with a 100 PSI (690 kPa) supply and a 20 PSI (138 kPa) cushion load. $12 \text{ in}^2 \times 80 \text{ PSI} = 960 \text{ lbs.}$ ($77.42 \text{ cm}^2 \times 551 \text{ kPa} = 435 \text{ Kg}$) of thrust.					
Positioner	Suitable for all standard instrument air signals; direct or reverse acting, top or bottom loading (3)					
Standard Accessories	Integrally piped cushion-loading regulator and gauge (for units with positioners only)					
Materials of Construction	Cylinder: Aluminum Piston: Aluminum Stem: 303 Stainless Steel		Lipseals: Buna "N" Spacer Bars: Steel			
Approximate Shipping Weight	2" = 15 lbs. (6.80 Kg) 5" = 15 lbs. (6.8 Kg) 8" = 25 lbs. (11.34 Kg)	3" = 20 lbs. (9.1 Kg) 4" = 20 lbs (9.1 Kg)	1-1/8" = 15 lbs. (6.80 Kg) 4" = 25 lbs. (11.34 Kg) 6" = 35 lbs. (4) (15.9 Kg)	1-1/2" = 20 lbs. (9.1 Kg) 4" = 30 lbs.(5) (13.6 Kg) 6" = 40 lbs.(5) (18.1 Kg) 8" = 45 lbs.(5) (20.4 Kg) 10" = 50 lbs.(5) (22.7 Kg)	2-1/2" = 20 lbs. (9.1 Kg) 4" = 35 lbs. (15.9 Kg) 10" = 55 lbs. (24.9 Kg)	4" = 65 lbs. (29.5 Kg)

NOTES:

- For catalog number make-up, refer to Control Engineering Data Sheets.
- Weights for Yoke Style Mounting Actuators are as follows:
 GB52U : 15 lbs. (6.80 Kg)
 GB53U : 15 lbs. (6.80 Kg)
 GB54U : 25 lbs. (11.34 Kg)
- For proper positioner selection, refer to Positioner Data Sheets
- Maximum piston travel is 6.750" (without collars)
- Maximum piston travel without collars is:
 4" Stroke = 4.125"
 6" Stroke = 6.750"
 8" Stroke = 8.750"
 10" Stroke = 10.750"
- For proper positioner selection, refer to positioner data sheets.

Mountain Controls



COPPUS®
Air Movers



Portable Ventilators
Fans & Blowers
Welding Fume Exhausters
Duct

Ball Valves and Actuators
Spring Return Electric Actuators
Resilient Seated Butterfly Valves
High Performance Butterfly Valves



Pressure Gauges
Thermometers
Needle Valves and Diaphragm Seals



Precision Air Regulators
Air, Gas, Steam & Water Regulators
Vacuum and Backpressure Regulators
I/P and E/P Transducers



Marshalltown-Tempco

Temperature Indicators
Temperature Switches
Capillary Bulb Type



Process Controllers
Multi-Loop
Process Indicators with Switches



POWERS
PROCESS CONTROLS
Quality...Our Commitment

Control Valves – Globe Type
Temperature Regulators
Self Contained
Temperature Controllers



Electric Actuators
Modulating Controllers
Spring Return – SURE
Mounting to your valves.



Ball Valves – 3-piece
Pneumatic Actuators
Electric Actuators
Specialty Valves



Solenoid Valves
Water – Air – Hot Water – Steam
Pilot Valves



**Valve
Actuator Mounting**

We stock electric actuators and can provide the mounting and testing to the valve of your choice

Mountain Controls

Salt Lake City, UT 84109
Phone: 801-487-8795

Seattle, WA 98125
Phone: 206-316-2330

www.mountaincontrols.com

info@mountaincontrols.com